

Model EPT1000 series

OEM Pressure Transmitter
Stainless steel pressure sensor
Mass production, automated calibration

Features

- ❑ Measuring ranges from 200mbar to 100bar
- ❑ Gauge pressure
- ❑ Accuracy: $\pm 0.25\%$ FSO(Typ.)
- ❑ Calibrated and temperature compensated
- ❑ Stainless steel pressure sensor
- ❑ Output 4...20mA, DC1...5V, DC0.5...4.5V, etc.



Application

- ❑ Hydraulic and pneumatic
- ❑ Machine building
- ❑ Pumps
- ❑ Water treatment
- ❑ IoT pressure measurement

Technical data

Pressure range

Nominal pressure [bar]	0.2	0.35	0.6	1	1.6	2.5	4	6	10	16	20	25	35	50	70	100
Overpressure [bar]	0.4	0.5	1	1.5	3	5	7	10	15	30	30	40	50	70	100	140

Performance

Accuracy*	0.25 %FS@25°C(Typ.) 0.5 %FS@25°C(Max.)	*Linearity (best straight line) + Hysteresis + Repeatability
Operating Temperature	-20 to 85°C	
Compensated Temperature Range	-10 to 70°C	
Vibration	20 g RMS(20 to 2000Hz)	
Shock	100 g(10ms)	
Cycles	10x10 ⁵	
Long Term Stability	0.2 %FS	

Electrical @25°C

Output signal / Supply	2-wire 4...20mA / V _S = 9... 30VDC
	3-wire 1...5VDC / V _S = 9... 30VDC
	3-wire 0.5...4.5VDC / V _S = 9... 30VDC
Insulation Resistance	100 MΩ@100VDC
EMC Test	IEC61000-6-2/IEC61000-6-3
Reverse polarity protection	No damage - no function

Physical Specifications


Housing	304 stainless steel
Diaphragm	316L stainless steel
Oil Filling	Silicone oil
Protection	IP65
Weight	~200g

The listed specifications and dimensions are subject to change without prior notice

Model EPT1000 series

OEM Pressure Transmitter
Stainless steel pressure sensor
Mass production, automated calibration

Dimensions (All dimensions in mm)

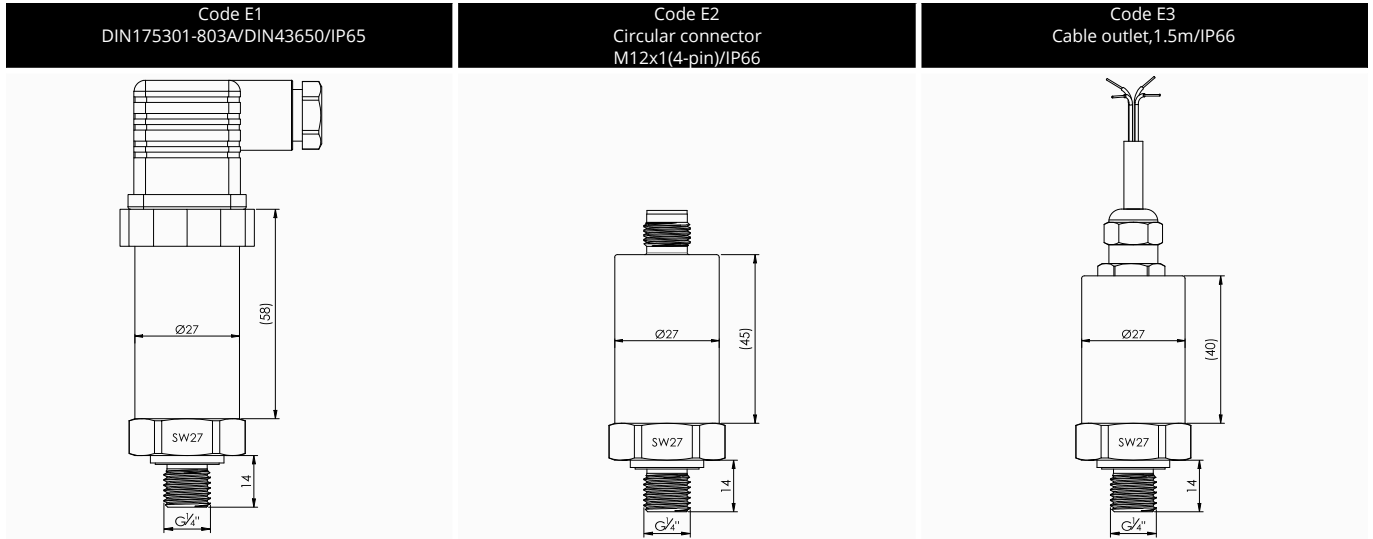

Electrical connections

DIN175301-803-A	4...20mA 2-wire	1...5VDC 3-wire	0.5...4.5VDC 3-wire
+Vcc	1	1	1
OUT	2	3	3
GND	NA	2	2

Connector M12x1(4-pin)	4...20mA 2-wire	1...5VDC 3-wire	0.5...4.5VDC 3-wire
+Vcc	1	1	1
OUT	3	4	4
GND	NA	3	3

Ordering code

Model	Range	Type	Output	Pressure Port	Electrical Connection
EPT1000	01 0.2bar	G Gauge	42 4...20mA	01 G¼ male	E1 DIN175301-803A/IP65
	02 0.35bar	A Absolute	15 DC 1...5V	02 G½ male	E2 M12 connector/IP66
	03 0.6bar		05 DC 0...5V	03 ¼NPT male	E3 Cable outlet, 1.5m/IP66
	04 1bar		45 DC 0.5...4.5V	04 ½NPT male	
	05 1.6bar		10 DC 0...10V	05 PT¼ male	
	06 2.5bar		25 DC 0...2.5V	06 PT½ male	
	07 4bar			07 M20x1.5 male	
	08 6bar			99 Custom	
	09 10bar				
	10 16bar				
	11 20bar				
	12 25bar				
	13 35bar				
	14 50bar				
	15 70bar				
	16 100bar				
	17 -0.1...+0.1bar				
	18 -0.2...+0.2bar				
	19 -1...0bar				
	20 -1...9bar				
	21 -1...16bar				
	22 -1...30bar				
	99 Custom				