




Series V6

# FLOTECT® Mini-Size Flow Switches

Monitor flow in 1/2" to 2" pipe, Explosion-proof

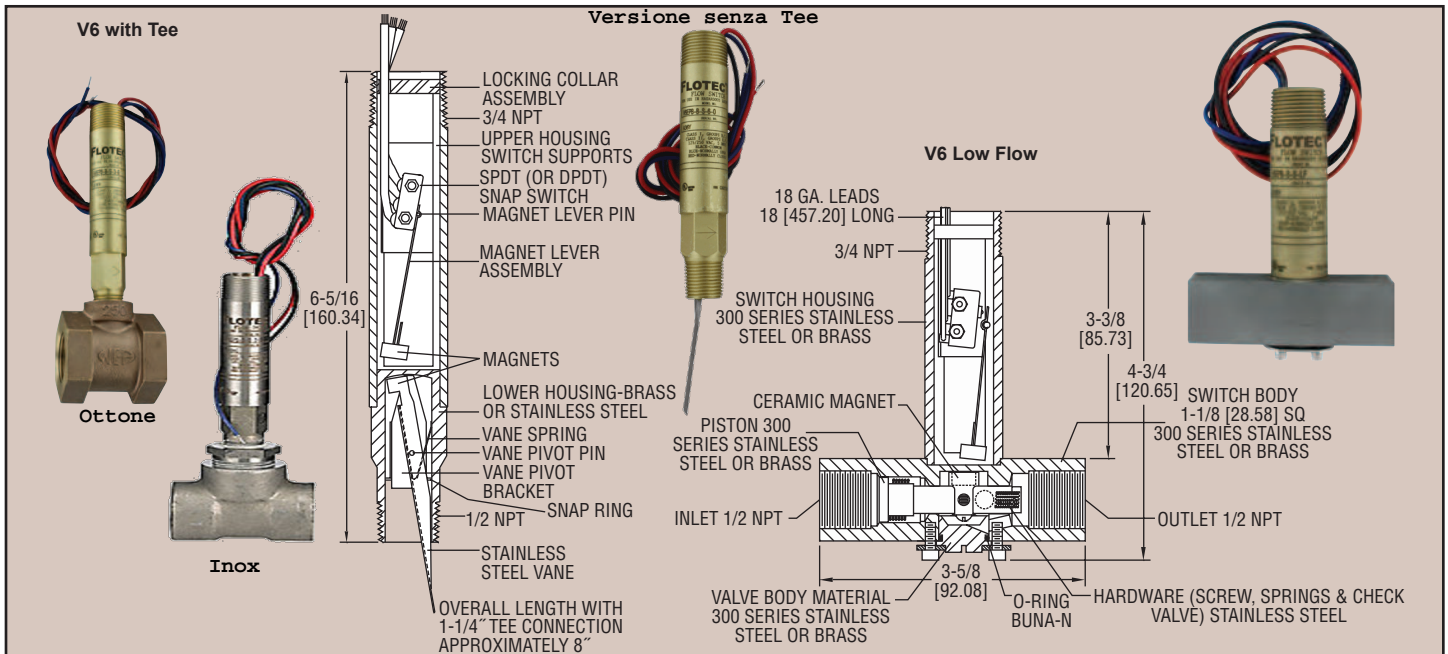

Surprisingly compact, the Series V6 Flotect® Flow Switch is engineered to specifically monitor liquid, gas, or airflows. Operation is simple and dependable with no mechanical linkage as the flow switch is magnetically actuated. The lower body holds the flow vane and one magnet, which controls the switch actuating magnet in the separate upper housing. In most applications the switch is normally off with the pipeline flow forcing the vane against the vane spring. As the flow decreases the vane spring pushes back the vane, actuating the switch to signal an alarm or shutdown. Tees are available for installation in pipelines from 1/2" to 2", with bushings added the unit is easily adapted to 1/4" and 3/8" piping.

### FEATURES

- Leak proof lower body machined from bar stock
- Choice of models in a tee with calibrated vane or field adjustable trimmable vane
- Weatherproof
- Explosion-proof (listing included in specifications)
- Electrical assembly can be easily replaced without removing the unit from the installation so that the process does not have to be shut down
- High pressure rating of 1000 psig (69 bar) with brass body and 2000 psig (138 bar) on the 316 SS body (see specifications)
- Low flow model offers field adjustable set point
- Easy installation, simply insert the tee in the pipeline and complete electrical connections

### APPLICATIONS

- Protects pumps, motors and other equipment against low or no flow
- Controls sequential operation of pumps
- Automatically starts auxiliary pumps and engines
- Shuts down burner when air flow through heating coil fails
- Controls dampers according to flow

### SPECIFICATIONS

**Service:** Gases or liquids compatible with wetted materials.

**Wetted Materials:** Standard V6 Models: Vane: 301 SS; Lower Body: brass or 303 SS; Magnet: ceramic; Other: 301, 302 SS; Tee: brass, iron, forged steel, or 304 SS.

V6 Low Flow Models: Lower Body: brass or 303 SS; Tee: brass or 304 SS; Magnet: ceramic; O-ring: Buna-N standard, Fluoroelastomer optional; Other: 301, 302 SS.

**Temperature Limits:** -4 to 220°F (-20 to 105°C) Standard, MT high temperature option 400°F (205°C) (MT not UL, CSA, ATEX, IECEx or KC) ATEX Compliant AT, IECEx IEC Option and KC (KC Option), Ambient Temperature -4 to 167°F (-20 to 75°C) Process Temperature: -4 to 220°F (-20 to 105°C).

**Pressure Limit:** Brass lower body with no tee models 1000 psig (69 bar), 303 SS lower body with no tee models 2000 psig (138 bar). Brass tee models 250 psi (17.2 bar), iron tee models 1000 psi (69 bar), forged and stainless steel tee models 2000 psi (138 bar), low flow models 1450 psi (100 bar).

**Enclosure Rating:** Weatherproof and Explosion-proof. Listed with UL and CSA for Class I, Groups A, B, C and D; Class II, Groups E, F, and G. (Group A on stainless steel body models only).

ATEX **CE** 0344 **Ex** II 2 G Ex d IIC T6 Gb Process Temps 75°C Alternate Temperature Class T5 Process Temps 90°C, 115°C (T4) Process Temp ≤105°C consult factory. EC-type Certificate No.: KEMA 04ATEX2128.

ATEX Standards: EN 60079-0: 2009; EN 60079-1: 2007.

IECEx Certified: For Ex d IIC T6 Gb Process Temps 75°C Alternate Temperature Class T5 Process Temps 90°C, 115°C (T4) Process Temps 105°C consult factory.

IECEx Certificate of Conformity: IECEx DEK 11.0039;

IECEx Standards: IEC 60079-0: 2007; IEC 60079-1: 2007;

Korean Certified (KC) for: Ex d IIC T6 Gb Process Temps ≤75°C;

KTL Certificate Number: 2012-2454-75.

**Switch Type:** SPDT snap switch standard, DPDT snap switch optional.

**Electrical Rating:** UL models: 5A @ 125/250 VAC. CSA, ATEX and IECEx models: 5A @ 125/250 VAC (V~); 5A res., 3A ind. @ 30 VDC (V-). MV option: .1A @ 125 VAC (V~). MT option: 5A @ 125/250 VAC (V~). [MT option not UL, CSA, ATEX or IECEx].

**Electrical Connections:** UL models: 18 AWG, 18" (460 mm) long. ATEX/CSA /IECEx models: terminal block.

**Upper Body:** Brass or 303 stainless steel.

**Conduit Connections:** 3/4" male NPT standard, 3/4" female NPT on junction box models.

**Process Connection:** 1/2" male NPT on models without a tee.

**Mounting Orientation:** Switch can be installed in any position but the actuation/deactuation flow rates in the charts are based on horizontal pipe runs and are nominal values.

**Set Point Adjustment:** Standard V6 models none. Without tee models vane is trimmable. Low flow models are field adjustable in the range shown. See set point charts on opposite page.

**Weight:** 2 to 6 lb (.9 to 2.7 kg) depending on construction.

**Options not Shown:** Custom calibration, bushings, PVC tee, reinforced vane, DPDT relays.

**Agency Approvals:** ATEX, CE, CSA, IECEx, UL.

TARABILE in fabbrica  
come volete!

Può essere montato  
su tubazione verticale  
fino a 1"

<b>Example</b>	V6	EP	B-B	S	2	B	MT	V6EPB-B-S-2-B-MT flow switch; brass body, brass tee with 3/4" NPT connections, SPDT snap switch, and high temperature option
<b>Series</b>	V6							Series V6 flow switch
<b>Construction</b>		EP						Explosion proof
<b>Body</b>			B-B S-S					Brass SS
<b>Circuit (Switch)</b>				S D				SPDT DPDT
<b>Tee Connection Size</b>					1 2 3 4 5 6 LF			1/2" NPT 3/4" NPT 1" NPT 1-1/4" NPT 1-1/2" NPT 2" NPT Low Flow Model (1/2" NPT connections)  <i>Per la versione filettata BSP, aggiungere E (es. 3E, LFE, ecc.)</i>
<b>Tee Material</b>					MI FS B S 0			Iron Forged Steel Brass SS No tee, field trimmable vane** (For LF Model no tee material chosen, tee material matches body choice)
<b>Options</b>						CSA AT IEC MV MT VIT		CSA approved construction with junction box* ATEX compliant construction with junction box IECEx certified construction with junction box Gold contacts on snap switch for dry circuits (see specifications for ratings) High temperature option rated 400°F (205°C) (see specifications for ratings)* Fluoroelastomer O-rings in place of Buna-N on low flow models

\*Options that do not have ATEX.

\*\*Vane will be trimmed to the connection size. If full field trimmable vane is desired, must select with tee connection size 6.

#### V6 Set Point Charts - Factory Installed Tee

Approximate Actuation-Deactuation Flow Rates for Air. Upper figures are SCFM, Lower figures in LPM		
Pipe Size	Actuate	Deactuate
1/2"	6.50	5.00
	180	120
3/4"	10.0	8.00
	300	240
1"	14.0	12.0
	420	360
1-1/4"	21.0	18.0
	600	540
1-1/2"	33.0	30.0
	960	840
2"	43.0	36.0
	1200	1020

Approximate Actuation-Deactuation Flow Rates for Cold Water. Upper figures are GPM, Lower figures in LPM		
Pipe Size	Actuate	Deactuate
1/2"	1.50	1.00
	5.667	3.83
3/4"	2.00	1.25
	7.5	4.67
1"	3.00	1.75
	11.33	6.67
1-1/4"	4.00	3.00
	15.17	11.3
1-1/2"	6.00	5.00
	22.67	18.9
2"	10.00	8.50
	37.83	32.2

Model	Size	Body	Tee
V6EPB-B-S-1-B	1/2"	Brass	Brass
V6EPB-B-S-2-B	3/4"	Brass	Brass
V6EPB-B-S-3-B	1"	Brass	Brass
V6EPB-B-S-4-B	1-1/4"	Brass	Brass
V6EPB-B-S-5-B	1-1/2"	Brass	Brass
V6EPB-B-S-6-B	2"	Brass	Brass
V6EPB-B-S-1-MI	1/2"	Brass	Iron
V6EPB-B-S-2-MI	3/4"	Brass	Iron
V6EPB-B-S-3-MI	1"	Brass	Iron
V6EPB-B-S-4-MI	1-1/4"	Brass	Iron
V6EPB-B-S-5-MI	1-1/2"	Brass	Iron
V6EPB-B-S-6-MI	2"	Brass	Iron
V6EPS-S-S-1-FS	1/2"	SS	FS
V6EPS-S-S-2-FS	3/4"	SS	FS
V6EPS-S-S-3-FS	1"	SS	FS
V6EPS-S-S-4-FS	1-1/4"	SS	FS
V6EPS-S-S-5-FS	1-1/2"	SS	FS
V6EPS-S-S-6-FS	2"	SS	FS
V6EPS-S-S-1-S	1/2"	SS	SS
V6EPS-S-S-2-S	3/4"	SS	SS
V6EPS-S-S-3-S	1"	SS	SS
V6EPS-S-S-4-S	1-1/4"	SS	SS
V6EPS-S-S-5-S	1-1/2"	SS	SS
V6EPS-S-S-6-S	2"	SS	SS
V6EPB-B-S-6-0	No Tee	Brass	None
V6EPS-S-S-6-0	No Tee	SS	None
V6EPB-B-S-LF	1/2"	Brass	LF, Brass
V6EPS-S-S-LF	1/2"	SS	LF, SS

#### V6 Low Flow Set Point Chart

Min-Max Flow Rates in 1/2" Pipe		
Media	Actuate	Deactuate
GPM-Water	.04-0.75	.03-0.60
LPM-Water	.15-2.84	.11-2.27
SCFM-Air	.18-2.70	.15-2.0
LPS-Air	.09-1.3	.07-.95

LF  
Regolabile dall'utente in questo range

Pressure drop (head loss) is a function of both set point and flow rate. Typically, pressure drop at actuation flow rate listed will be 5-10 psid (.34-.69 bar). Pressure drops at other flow rates will vary in proportion to the (change in flow).



# OPZIONI AGGIUNTIVE



- S150 SS 150# (max 150psi, più economico)
- PVCSW PVC a saldare
- KC certificato Korea
- CV calibrato in fabbrica (anche al di fuori dei campi standard)
- FTR Flow test report
- GL Ground Lead (CSA senza junction box)
- ID targhetta personalizzata
- JCTLH con scatola di derivazione con connettore a sinistra
- NN nessuna targhetta
- ORFB orifizio cieco per cambiare il set point, in ottone
- ORFS orifizio cieco per cambiare il set point, in acciaio inox
- PT targhetta identificativa in carta
- RV vano rinforzato
- ST targhetta in acciaio inox
- TBC Terminal Block connector
- VIT Guarnizioni in Viton
- 018 molla 0.018
- 020 molla per liquidi, attuazione 0.18-1.8 L/min
- 022 molla per liquidi, attuazione 0.18-2 L/min
- 022A molla per liquidi, attuazione 0.18-2 L/min, Alnico
- 031 molla con attuazione 0.68-3.86 L/min acqua o 5-99 L/min aria
- BUSH2 senza T, connessione 3/4"NPT
- BUSH3 senza T, connessione 1"NPT
- BUSH4 senza T, connessione 1-1/4"NPT
- BUSH5 senza T, connessione 1-1/2"
- BUSH6 senza T, connessione 1"NPT
- BUSH7 senza T, connessione 3/4"BSPT, elettrica M25x1.5
- BUSH8 senza T, connessione 1"BSPT, elettrica M25x1.5
- BUSH9 senza T, connessione 1-1/4"BSPT, elettrica M25x1.5
- BUSH10 senza T, connessione 1-1/2"BSPT, elettrica M25x1.5
- BUSH11 senza T, connessione 1"BSPT, elettrica M25x1.5

Opzioni BUSH...



## Rometec srl

Via Alessandro Minuziano, 87 - 89

00128 - Roma

Tel 06-5061635 Fax 065061542

P.Iva 0412062100

[www.rometec.it](http://www.rometec.it)