

BG SERIES Ball Valve




Features

- Pressure rating up to 3000psig(207bar)
- Working temperature from -50°F to 150°F(10°C to 65°C)
- Panel mountable as standard
- Size: NAI-LOK 1/4 to 1/2 in.
- Every valve is 100% factory tested with Nitrogen @1000psig(69bar)

Technical Data

Body Material	316 Stainless steel
Handle	Black Nylon
Mounting Nut	316 Stainless steel
Seat	PTFE
Packing	PTFE
Max Working Pressure	3000 psig (207 bar)
Working Temperature	-50°F to 150°F (10°C to 65°C) For low working temperature, please contact factory
Size	1/4"-1/2"
End Connection	NPT female / NAI-LOK tube fitting

Dimension (mm)

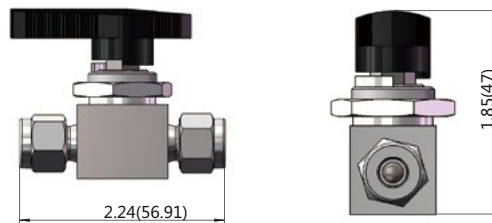

Dimension drawings shown are for reference only.

Ordering Information

BG	S	F	4	2
BASIC SERIES	MATERIAL	END CONNECTIONS	SIZE	DESIGN
BG	S - 316 Stainless steel	N - NAI - LOK F - Female NPT	4 - 1/4 in. 6 - 3/8 in. 8 - 1/2 in.	2 - 2 - way straight (standard) A - 2 - way angle 3 - 3 - way